

DATA SHEET

PS 600 K+ Thermal Store

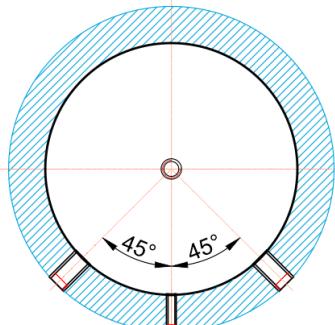
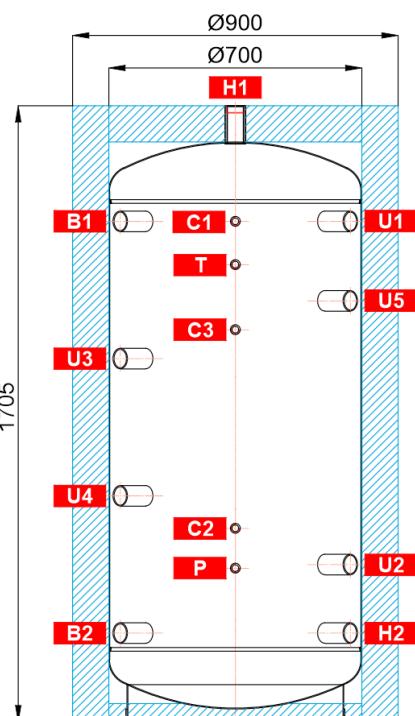
Main Features	
Application	Storage and subsequent distribution of thermal energy from solid-fuel boilers, heat pumps or other heat sources
Working fluid	water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1), thermal oil
Storage tank code	15291
Insulation code	19314

Energy Efficiency Data (as per EC Regulation No. 812/2013)	
	valid for a tank with insulation
Energy efficiency class	N/A
Static loss	102 W
Storage volume	560 l

Technical data	
Total storage tank volume	560 l
Max. working temperature in storage tank	95 °C
Max. working pressure in storage tank	4 bar
Storage tank diameter	700 mm
Storage tank diameter with insulation	900 mm
Storage tank overall height	1705 mm
Tipping height without insulation	1750 mm
Storage tank perimeter insulation thickness	100 mm
Storage tank bottom insulation thickness	50 mm
Storage tank top insulation thickness	100 mm
Empty weight without insulation	76 kg

Materials	
Storage tank material	S235JR
Storage tank perimeter insulation	fleece
Storage tank outer surface insulation	hard polystyrene
Top and bottom storage tank insulation	fleece

Accessories	
Electrical heating element	ETT-A, C, D, F, P, M
Heating element max. length	755 mm

PS 600 K+ Thermal Store
Dimensions

TAPPINGS

pos.	description	connection	height [mm]
Heat sources			
B1	Supply from heat source	G 6/4" F	1385
B2	Return to heat source	G 6/4" F	245
Heating system			
H1	Supply to heat sink	G 6/4" F	1705
H2	Return from heat sink	G 6/4" F	245
Control and safety			
C1	Temperature sensor	G 1/2" F	1385
C2	Temperature sensor	G 1/2" F	535
C3	Temperature sensor	G 1/2" F	1085
T	Thermometer	G 1/2" F	1265
P	Safety valve	G 1/2" F	425
Universal inlet/outlet			
U1	Universal inlet/outlet	G 6/4" F	1385
U2	Universal inlet/outlet	G 6/4" F	435
U3	Universal inlet/outlet	G 6/4" F	1005
U4	Universal inlet/outlet	G 6/4" F	625
U5	Universal inlet/outlet	G 6/4" F	1165