

MANIFOLDS AND PRESSURE BALANCERS



HV 80/125 Manifolds / Collectors for 2-3 heating circuits


Insulated manifolds, to connect two or three 5/4" heating circuits. They permit fitting pump stations to heating circuits and connecting a heat source either directly or via a hydraulic pressure balancer.

TECHNICAL DATA

MAX. PRESSURE	6 bar
MAX. FLOWRATE	7 m³/h
THERMOINSULATING CASE	152 × 152 mm

TYPES	HV 80/125-2	HV 80/125-3
APPLICATION	2 heating circuits	3 heating circuits
LENGTH	625 mm	875 mm
CODE	15857	17230

CONNECTIONS

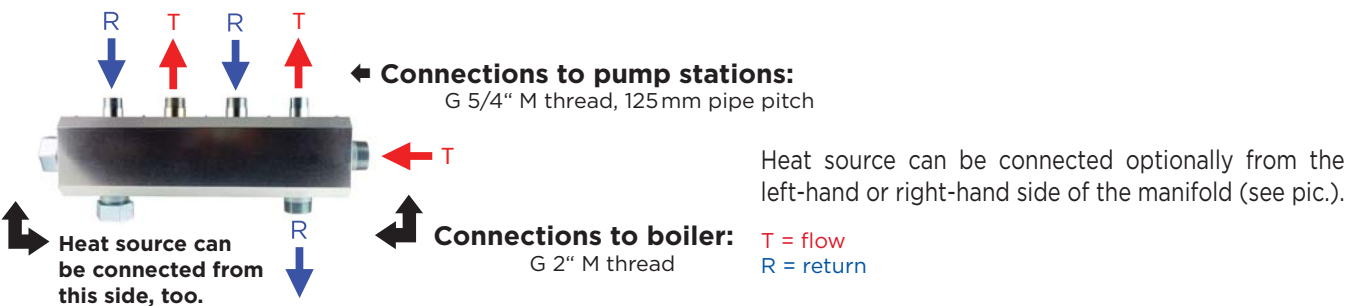

ACCESSORIES



Wall support
Pair of wall-mount manifold supports.
Distance between wall and manifold centre: 160 mm.
Code: 17599



Union
1"x5/4" Fu/F to connect 1" pump stations
Code: 17920