

G 6/4" ELECTRIC HEATING ELEMENTS with thermostatic head and contactor

Output: 2 - 3 kW

Application: thermal stores and hot water storage tanks




ETT-D Electric Heating Elements

Nickel-plated resistance heating elements with a **thermostatic head** and contactor, intended for heating of static heating water or antifreeze fluid in thermal stores or for drinking water heating in hot water storage tanks. These elements are not intended for stainless steel tanks. They **are suitable for drinking water heating** in hot water storage tanks.

They are designed to be installed in a horizontal position so that the element is completely immersed, the cable gland downwards. They are power supplied by a 5-core cable wired to a terminal box or fuse board.

The heating element features one input for a Ripple control signal and one for master heating system controller.

Dimensions, Models

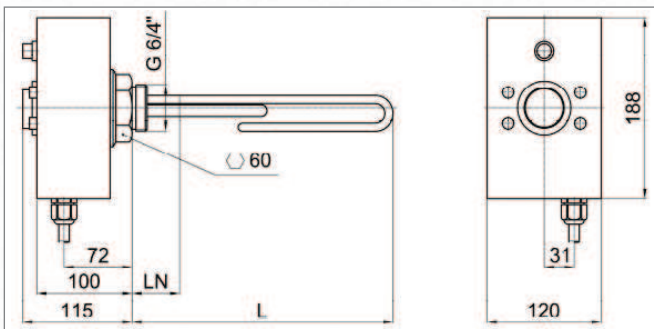


MODEL		ETT-D	ETT-D
		2.0	3.0
NOMINAL OUTPUT	kW	2.0	3.0
NOMINAL CURRENT	A	8.7	13.0
ELEMENT LENGTH (L)	mm	315	370
NON-HEATING END LENGTH (LN)	mm	100	100
CODE	--	11 783	11 784

Technical Data

HEATING ELEMENT	nickel plated copper
CONNECTION	G 6/4" M
HEXAGON WITH G 6/4" THREAD	nickel plated brass
CASE	aluminium alloy
POWER SUPPLY	230V 50 Hz
IP RATING	IP 54
PROTECTION CLASS BY EN 61140 ed.2	I
OPERATING THERMOSTAT	capillary type, adjustable
SWITCH-OVER CONTACT	16 A
TEMPERATURE ADJUSTMENT RANGE	from 0 ± 5 °C to 90 ± 3 °C
TEMPERATURE ADJUSTMENT METHOD	rotating knob
SWITCHING DIFFERENCE	5 ± 1.5 °C
LOWER LIMIT	about 15 °C – frost protection
UPPER LIMIT	about 60 °C – for HW storage tanks
SAFETY THERMOSTAT	capillary type, fixed setting
SWITCH OFF TEMP.	99 +0/-6 °C
RESET	manual, after temperature drops below 50 °C
CONTACTOR	AC1 : 20 A / 690 V, 1Z
COIL VOLTAGE	AC 220 – 240 V
FREQUENCY	50 Hz

Electric Wiring

1/N/PE AC 230V

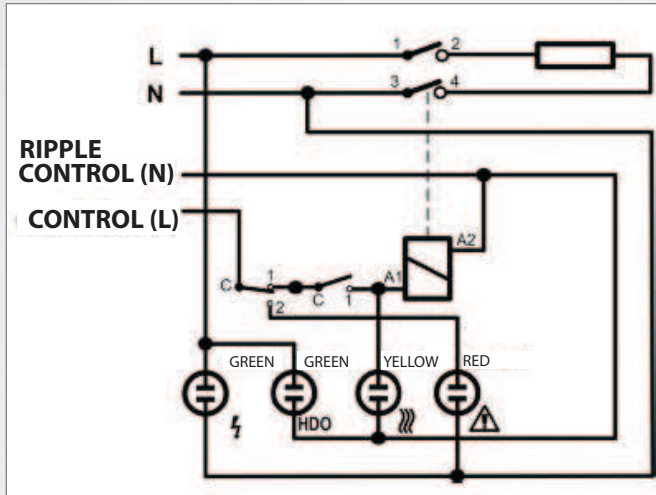

POWER CABLE

CROSS SECTION	5 × 1.5 mm ²
LENGTH	2 m
CABLE GLAND	Pg11

Wiring examples:

