

FILTERMAG

Brass filter with magnet.

- Replaceable stainless-steel strainer, mesh size 1000 µm.
- Bar magnet, induction 13 000 Gs.
- Connection size G 1" M.


Code – 17610



Installation

The filter shall be installed in the heating system so that the arrow on the filter body points in the flow direction of the working fluid.

The filter can be installed either horizontally or vertically, but the filter cap must be always facing downwards and remain easily accessible.

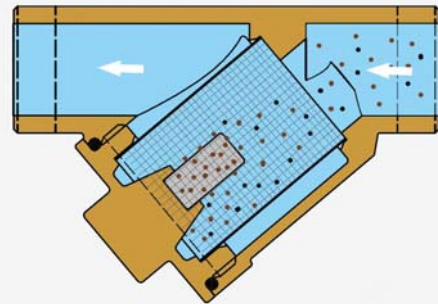

Cleaning

Close ball valves upstream and downstream of the filter, if installed, or drain the fluid from the system.

Unscrew the plastic cap with strainer and magnet (**Fig. 1**).

Remove the strainer (**Fig. 2**).

Remove dirt from both the magnet and strainer.

Reassemble (**Fig. 3**).



Fig. 1



Fig. 3

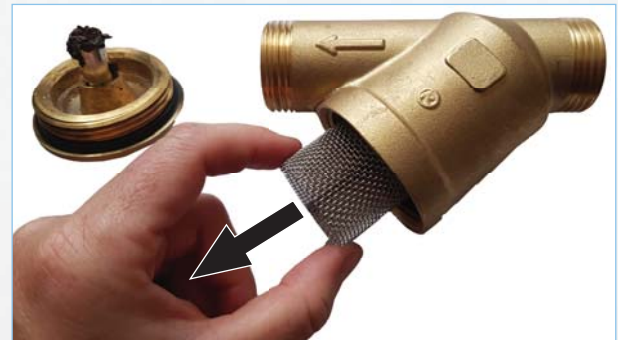


Fig. 2