

DESCALING CIRCULATION PUMPS

Descaling circulation pumps designed to remove sediments with the use of chemicals. Equipped with a 4-way valve, they facilitate cleaning solution flow reversal for the best cleaning results.



DOS 25 V4V




DOS 40 V4V




TARTARUGA V4V

		DOS 25 V4V	DOS 40 V4V	TARTARUGA V4V
TANK VOLUME	l	20	25	5
FLOW RATE	l/min	56	70	18
HEAD	m	10	10	7
CONNECTION	--	1/2"	3/4"	1/2"
VOLTAGE	--	250 VAC/50 Hz	250 VAC/50 Hz	250 VAC/50 Hz
PUMP TYPE	--	rotary, 165 W	rotary, 290 W	rotary, 165 W
MAX. WORKING TEMPERATURE	°C	50	50	50
IP RATING	--	IP55	IP55	IP55
DIMENSIONS (H x W x L)	mm	500 x 350 x 350	630 x 350 x 350	350 x 330 x 300
WEIGHT	kg	8.5	11	4.7
CODE	--	590	7786	5990

Design of DOS:

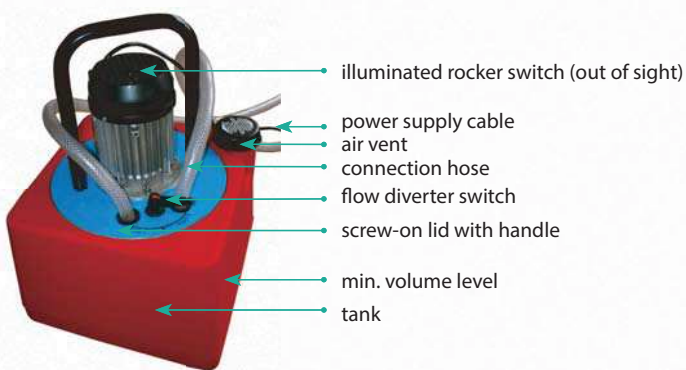

Design of Tartaruga:

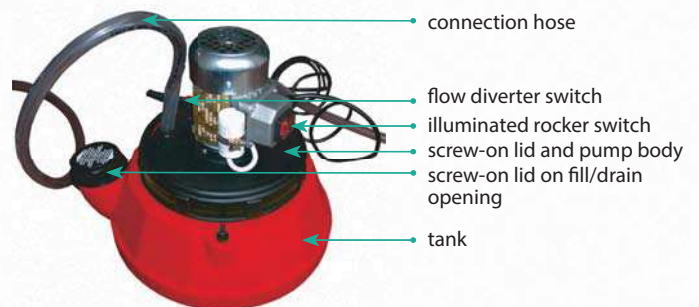

Note:

Use only chemical agents recommended by Regulus. Pipes, heat exchangers or systems to be cleaned must permit the solution to flow through.