E-mail: sales@regulus.eu Web: www.regulus.eu



DATA SHEET

CSE2 SOL G SRS1 T P Solar Pump Station





Main Features	
Application	This twin-line solar pump station contains all components necessary for current and efficient operation. It is designed for operation with one solar consumer (e.g. hot water tank). An auxiliary electric heating element of 2–3 kW output or a gas boiler (or another switched heat source) can be connected with the pump station. Switching ON/OFF the heat source is controlled by a heating controller. The heat source must be connected to a potential-free switching contact of the controller (max. 3 kW) and must be controlled by the additional temperature sensor S3. A heating element, safety temperature limiter of the switched heat source and the S3 sensor are not included in the scope of supply.
Description	The pump station includes: - UPM3 Hybrid 25-70 circulation pump, - SRS1 T controller, - check valve, - safety valve with G 3/4" F outlet, - ball valve on the supply line, 2 ball valves on the return line, - air eliminator with manual air vent valve, - flowrate indicator, - pressure gauge, - thermometers on both flow and return lines, - two G 3/4" M valves for filling, draining and topping up the solar thermal system, - G 3/4" M outlet for connecting an expansion vessel, - already connected temperature sensor of a solar consumer (4 m long), - already connected cable w. silicone insulation to connect a solar sensor (1 m long), - solar temperature sensor (2 m long cable), - already connected 230 V power cord with plug (3 m long, 3 x 1.5 mm² cross section), - mounting kit for installation on a wall or tank, - insulation.
Installation	On a tank or wall.
Working fluid	Water–glycol mixture (max. 1:1).
Codes	20581 – connections G 3/4" M, flow 2–12 l/min 20577 – connections G 1" M, flow 8–28 l/min

Pump Station Data	
Max. fluid working temperature	110 °C
Max. working pressure	6 bar
Min. system pressure	1.3 bar with the pump stopped
Ambient temperature	5 to 40 °C
Max. relative humidity	85% at 25 °C
Power supply	230 V, 50 Hz
Max. switched current	13 A/230 V
Insulation material	EPP RG 60 g/l
IP rating	IP20
Overall dimensions (w x h x d)	405 x 490 x 155 mm
Total weight	6.8 kg


Tel.: +420 241 765 191


Fax: +420 241 763 976



DATA SHEET

CSE2 SOL G SRS1 T P Solar Pump Station

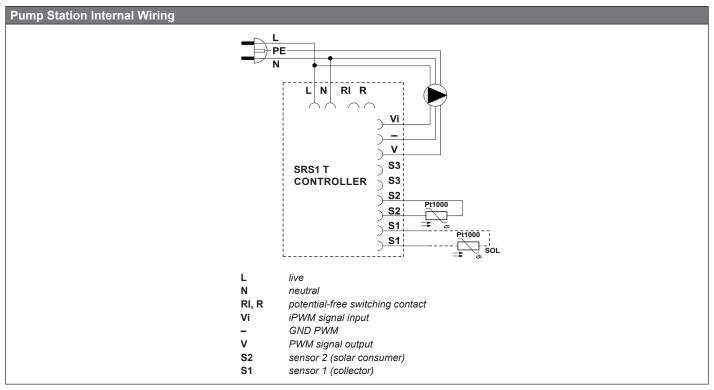

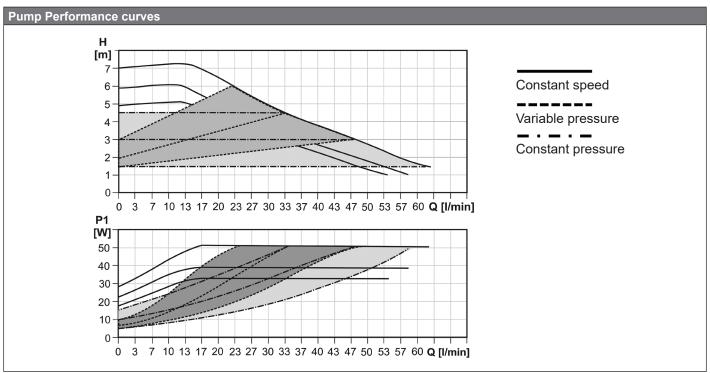


Tel.: +420 241 765 191

Fax: +420 241 763 976



DATA SHEET

CSE2 SOL G SRS1 T P Solar Pump Station

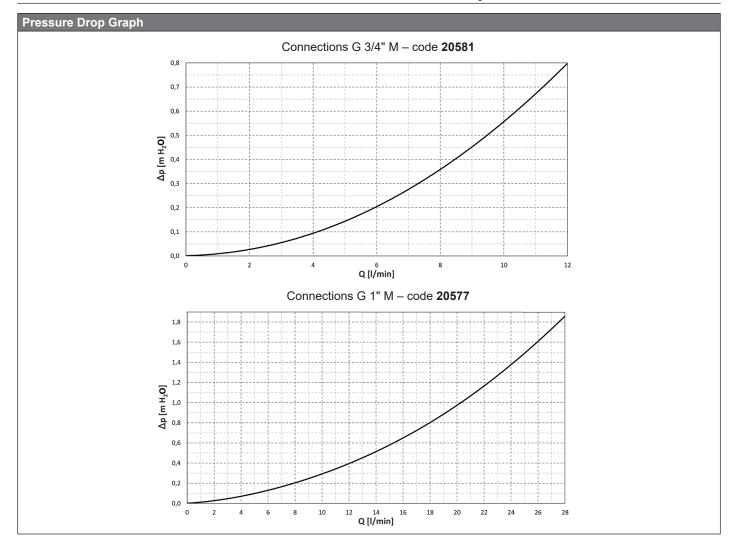

Tel.: +420 241 765 191

Fax: +420 241 763 976