


DATA SHEET

CSE2 TMV F G60 1F Pump Station



Main Features	
Application	Provides flow through the heating system, mixing to the outlet temperature using a manually adjustable thermostatic mixing valve with a range of 25–45 °C. The pump station includes a filter with magnet, so it is also suitable for older steel pipe systems. It can be easily mounted on a wall or on a manifold for multiple heating circuits. The pump station is especially suitable for heating circuits with underfloor, ceiling or wall heating.
Description	It consists of a Grundfos UPM3 AUTO 25-60 pump, TV MIX anti-scald valve, filter with magnet, check valve, ball valves w. sensor sheath, insulation.
Working fluid	Water, antifreeze heat-transfer fluid for heating systems.
Installation	Vertically on a wall or manifold (125 mm pitch).
Code	19487

Pump Station Data		
Fluid working temperature	5–95 °C	
Adjustable temperature range	25–45 °C +/– 3 °C	
Max. working pressure	10 bar	
Min. working pressure	0.5 bar	
Ambient temperature	5–40 °C	
Max. relative humidity	80 %, non condensing	
Pump station max. power input	39 W	
Pump power supply	230 V, 50 Hz	
Min./max. current to pump	0.04/0.4 A	
Mixing valve Kvs	3.5 m³/h	
Insulation material	EPP RG 60 g/l	
Overall dimensions	380 x 142 x 245 mm	
Total weight	6.6 kg	
Connections	4 x G 1" F	

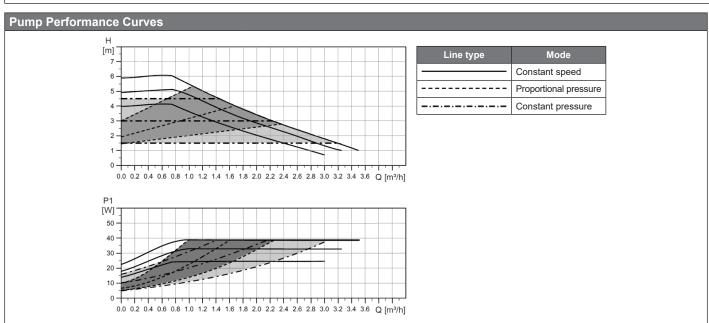


Tel.: +420 241 765 191

Fax: +420 241 763 976




DATA SHEET


CSE2 TMV F G60 1F Pump Station

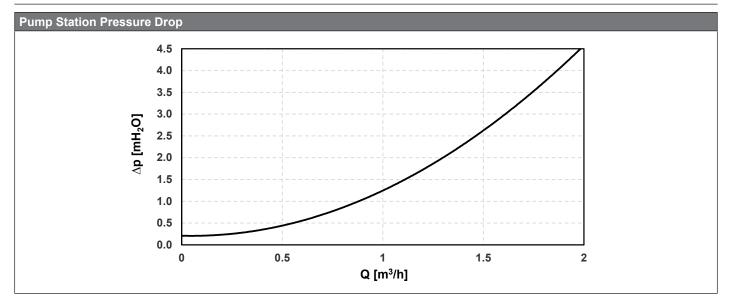


Approximate setting of the output temperature at the anti-scald valve

valve			
Point on the control	Output		
knob	temperature		
1	25 °C		
2	30 °C		
3	35 °C		
4	40 °C		
max.	45 °C		

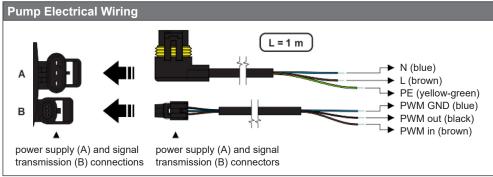

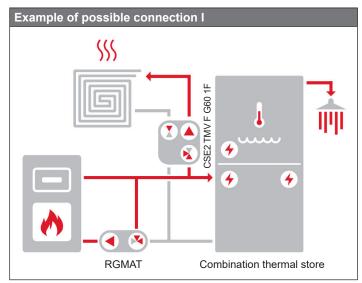

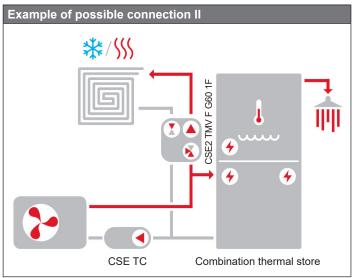

The diagrams show examples of the connection of a load unit / pump station to a heating system with a combination thermal store. RGMAT load units and CSE TC pump stations shall be ordered separately.

Tel.: +420 241 765 191

Fax: +420 241 763 976