

DATA SHEET

Ball Valve type KKR DN15-80 nickel plated



Main Features

Application	Used to completely close/open the working fluid flow.
Description	Ball valve with manual control.
Working fluid	Water, drinking water, antifreeze for heating and solar systems and heat pumps.


Technical Data

Max. working pressure	25 (16) bar see column PN in the table below
Fluid working temperature	-20 to 120 °C

Materials

Valve housing	brass CW 617N, nickel plated
Balls	brass CW 617N, chrome plated
Spindle seals	EPDM
Ball seals	PTFE

Dimensions

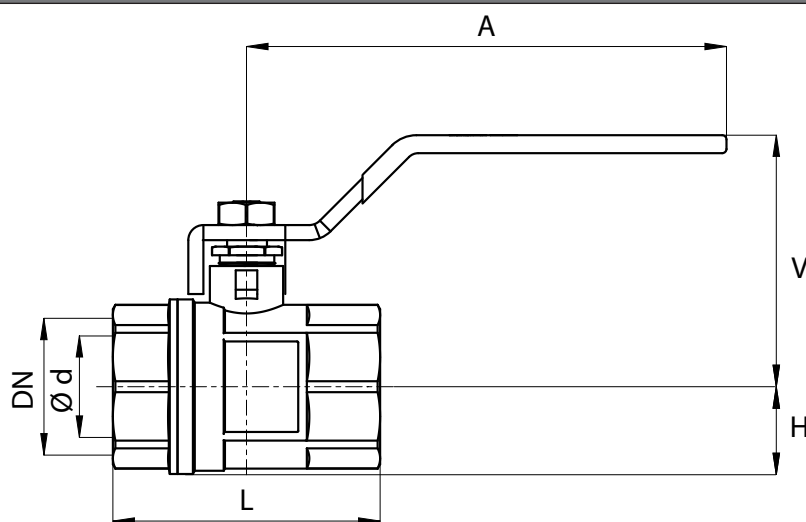

Code	DN	PN [bar]	Connection	A [mm]	L [mm]	d [mm]	H [mm]	V [mm]	Kvs [mm]	Weight [kg]
11965	15	25	G 1/2" F	93	49	13	14	48	14	0.16
11966	20	25	G 3/4" F	93	55	18	17	52	35	0.25
11967	25	25	G 1" F	115	64	21	20	60	42	0.35
11968	32	25	G 5/4" F	134	74	30	26	75	88	0.55
11969	40	25	G 6/4" F	134	82	32	30	77	100	0.70
11970	50	25	G 2" F	140	97	47	39	90	235	1.15
11971	65	16	G 2 1/2" F	245	118	57	48	115	430	2.40
11972	80	16	G 3" F	275	143	69	58	126	520	4.10