

DATA SHEET

RBC 500 Hot Water Storage Tank



Main features	
Application	Hot water tank intended for DHW heating, with integrated enamelled heat exchanger. It comes fitted with insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
Working fluid	water (tank), water, water/glycol mixture (max. 1:1) or water/glycerine (max. 2:1) (heat exchanger)
Code	6480

Energy Efficiency Data (as per EC Regulation No. 812/2013)	
Energy efficiency class	C
Standing loss	102 W
Storage volume	500 l

Technical data	
Total tank volume	515 l
Fluid volume in tank	500 l
Heat exchanger (HE) volume	15 l
Heat exchanger surface area	2,5 m ²
Max. working temperature in tank	95 °C
Max. working temperature in HE	110 °C
Max. working pressure in tank	10 bar
Max. working pressure in HE	10 bar
Tank diameter	650 mm
Tank diameter with insulation	760 mm
Tank overall height	1785 mm
Tipping height	1950 mm
Empty weight	163 kg

Hot water heating from 10 °C to 45 °C at heating water inlet temp. of 60 °C	
Heat exchanger	990 l/h (40 kW)

Materials	
Tank material	S235JR, inner surface enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surface enamelled (DIN 4753-3)
Tank perimeter insulation	PU foam (hard)
Insulation's outer surface	PVC


Accessories	
El. heating element	models ETT-A, D, F, P, M
Heating elem. max. length	680 mm
Electronic anode rod	code 17368
Flange including anodes	code 17432

Spare parts (magnesium anode rods)	
Mg anode r. (A1), G 5/4"	code 4025
Mg anode r. – into flange (A2,3), G 5/4"	code 4025

DATA SHEET

RBC 500 Hot Water Storage Tank

Heat exchanger pressure drop

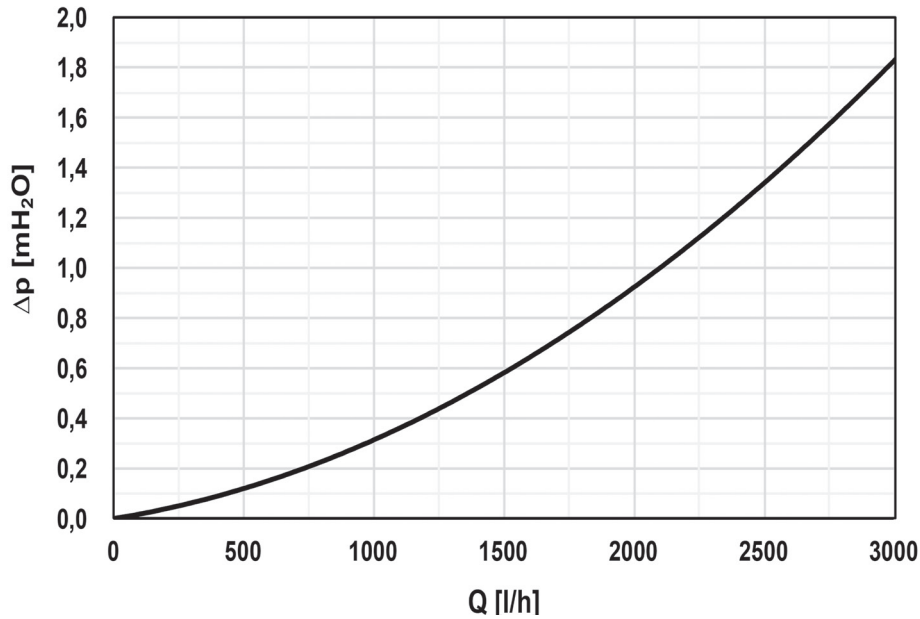

Dimensions

pos.	description	connection	height [mm]
DHW heating			
W1	cold water	G 5/4" F	175
W2	hot water	G 5/4" F	1595
W3	recirculation	G 1" F	1315
Auxiliary heat source			
E1	electric heating element	G 6/4" F	1150
Control and safety			
C1	temperature sensor	G 1/2" F	825
T	thermometer	G 1/2" F	1400
Heat sources			
X1	supply from heat source	G 5/4" F	1075
X2	return to heat source	G 5/4" F	320
Others			
L1	flange	8 x M10	335
A1	magnesium anode rod	G 5/4" F	1742
A2	magnesium anode rod	G 5/4" F	335

