PROTECTION AGAINST BOILER CORROSION AND FOULING
Load Units

RegulusRGMAT E G60 1“
Load Unit with thermostatic mixing

Load unit for solid-fuel boilers and fireplaces that **prevents low-temperature corrosion and boiler fouling by keeping a boiler (fireplace) inlet temperature** through a load valve.

RegulusRGMAT load unit comes in a left-hand version (outlet to boiler is on its left side), and can be easily modified to a right-hand version (outlet to boiler on its right side) during installation. Its installation position can be either horizontal or vertical.

COMPONENTS

- Grundfos UPM3 FLEX AS 25-60 high-efficiency circulation pump incl. connection cable
- Shutoff ball valve for the pump
- Thermometer
- Insulation
- TSV3BF valve w. thermostatic element, opening temperature 55° to 70°C.

TECHNICAL DATA

FLUID WORKING TEMPERATURE	**5–95 °C**
POWER SUPPLY	**230 V, 50 Hz**
IP RATING	**IP44**
TOTAL WEIGHT	**3.25 kg**
CONNECTIONS	**3x G 1“ F**
K_{vs} from A to AB	**6.2 m³/h**
K_{vs} from B to AB	**4.4 m³/h**
MAX. HEAD	**6 m**
PUMP OPERATING POINT at Δt 20 K	**1.7 m³/h flow rate 4.2 m head**
PUMP CONTROL	**ON/OFF (I, II, III) nebo PWM-A (topení)**

Prevention of low-temperature corrosion of boilers. Installation possible with A inlet from either right or left side. Minimum heat loss thanks to thermal insulation.

VERSIONS	CODE	VALVE OPENING TEMPERAT.	RECOMMENDED MAX. BOILER OUTPUT
RGMAT E 45 G60 1“	19083	45 °C	46 kW
RGMAT E 50 G60 1“	19090	50 °C	42 kW
RGMAT E 55 G60 1“	19086	55 °C	36 kW
RGMAT E 60 G60 1“	19092	60 °C	32 kW
RGMAT E 65 G60 1“	19089	65 °C	26 kW
RGMAT E 70 G60 1“	19091	70 °C	22 kW

CONNECTION IN A SYSTEM

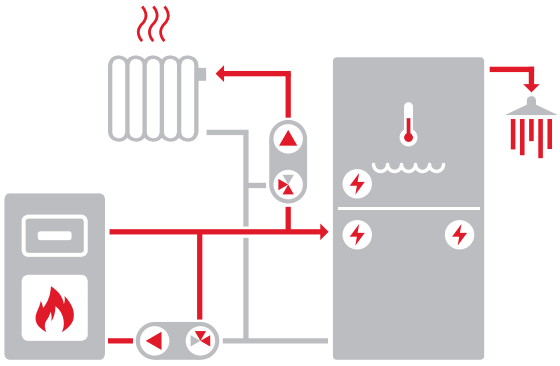

DIMENSIONS