

PROTECTION AGAINST BOILER CORROSION AND FOULING

Insulated Load Units



CSE MIX W F

Load unit with electric actuated mixing

Load unit designed to control return line of solid-fuel boilers or to control outlet to a mixed heating circuit using an external controller.

The load unit consists of:

- Wilo Circulation pump
- Load valve w. inner threads
- Load valve actuator
- Neat insulation for low heat loss


Technical Data

FLUID WORKING TEMPERATURE	5 - 110 °C
LOAD VALVE ACTUATOR	3-point control, 120 s, 5 Nm
POWER SUPPLY	230 V, 50 Hz
IP RATING	IP44

Versions

	CSE MIX W 1F	CSE MIX W 5/4F
Connection	1" (3x F)	5/4" (3x F)
Pump	Wilo Yonos Para RS25/6	Wilo Yonos Para RS25/7,5
Max. head	6.2m	7.6 m
K _{vs} of the valve	10 m ³ /h	16 m ³ /h
Code	16219	16215

Connection in a system

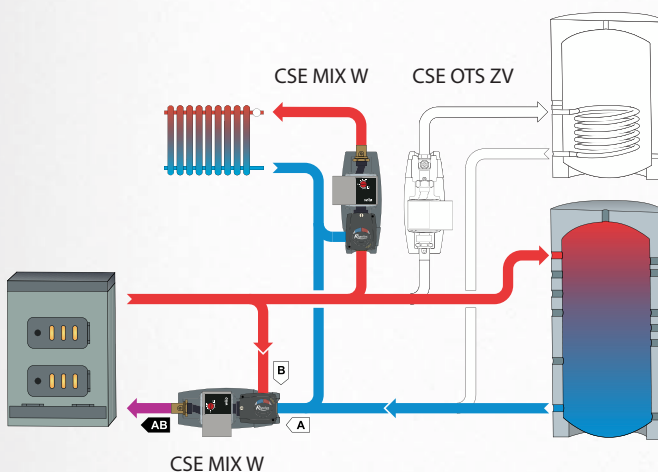

Dimensions

