

# MANIFOLDS AND PRESSURE BALANCERS



## HV 60/125 Manifolds / Collectors for 2-3 heating circuits

Insulated manifolds, to connect two or three 1" heating circuits.


They permit fitting pump stations to heating circuits and connecting a heat source either directly or via a hydraulic pressure balancer. HV SG models are moreover equipped with a G 1" M top connection point for a safety group (see accessories) and a G 3/4" F side connection point for an expansion vessel and/or a drain valve.

### TECHNICAL DATA

MAX. PRESSURE	6 bar
MAX. FLOWRATE	2 m <sup>3</sup> /h
THERMOINSULATING CASE	110 x 110 mm

TYPES	HV 60/125-2	HV 60/125 SG-2	HV 60/125-3	HV 60/125 SG-3
APPLICATION	2 heating circuits	2 heating circuits	3 heating circuits	3 heating circuits
LENGTH	508 mm	670 mm	758 mm	920 mm
CODE	9507	9186	9508	9187

### CONNECTIONS

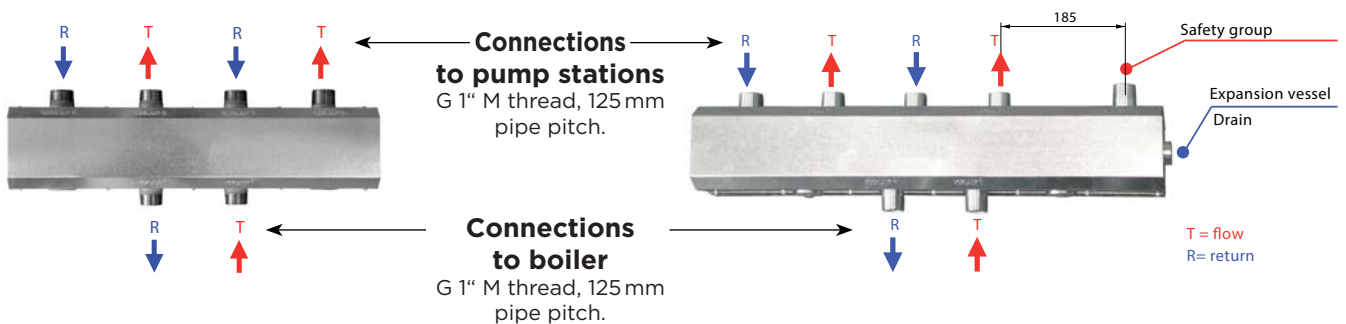

### ACCESSORIES



#### Wall support

Pair of wall-mount manifold supports.  
Distance between wall and manifold centre: 100 mm.

**Code: 9191**



**Safety group** with 20mm EPS insulation. Forged brass housing, connection: 1" F.

#### Contents:

1. Safety valve, 3 bar, 1/2"
2. Air vent valve, 12 bar
3. Check valve
4. Pressure gauge, 63 mm diam., 0-4 bar
5. Housing
6. Check valve

**Code: 9797**

