

MAGNET FILTERBALL

Ball Valve with strainer & magnet for heating systems.

- Easy cleaning, no tools needed.
- Replaceable stainless-steel strainer, mesh size 600 µm.
- Bar magnet, induction 12 000 Gs.
- Inner threads G 3/4" to G 2".
- Versions with lever or butterfly.

Connection size	Code - with lever	Code - with butterfly
3/4" F	17404	18318
1" F	17405	18319
5/4" F	17406	-
6/4" F	17407	-
2" F	17408	-

Installation

The ball valve may be installed horizontally (magnet facing up- or downwards) or vertically.

The flow direction marked by an arrow on the valve housing shall be always respected.

Cleaning

Close the ball valve.

Unscrew the plug with magnet by hand (**Fig. 1**).

Pull out the strainer and remove impurities from both the magnet and strainer (**Fig. 2**).

Reassemble after cleaning (**Fig. 3**).

Open the ball valve.

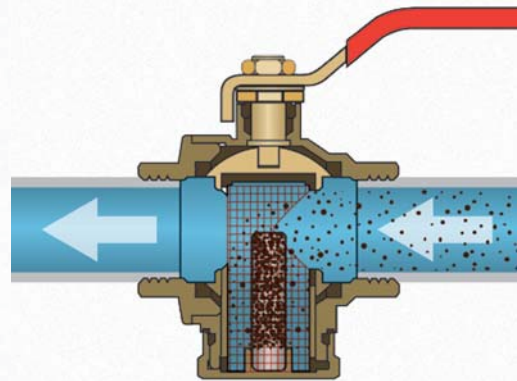
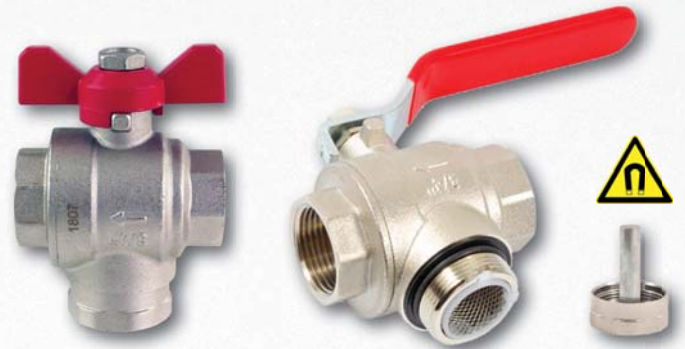


Fig. 1



Fig. 2



Fig. 3