

DATA SHEET

CSE2 MIX-BP F G60 1F Pump Station




Main Features

Application	It provides flow through the heating system, mixes to the outlet temperature in an electric actuated mixing valve (controlled by an external controller). The pump station includes a filter with magnet, so it is also suitable for older steel pipe systems. It can be easily mounted on a wall or on a manifold for multiple heating circuits.
Description	It consists of a Grundfos UPM3 AUTO 25-60 pump, LK 840 3-way mixing valve without actuator, filter with magnet, check valve, ball valves w. sensor sheath, insulation.
Working fluid	Water, antifreeze heat-transfer fluid for heating systems.
Installation	Vertically on a wall or manifold (125 mm pitch).
Code	19111


Pump Station Data

Fluid working temperature	5–95 °C
Max. working pressure	10 bar
Min. working pressure	0.5 bar
Ambient temperature	5–40 °C
Max. relative humidity	80 %, non condensing
Pump station max. power input	39 W
Pump power supply	230 V, 50 Hz
Min./max. current to pump	0.04/0.4 A
Mixing valve Kvs	6.3 m ³ /h
Max. pressure difference	5 mH ₂ O (at mixing valve inlets)
Leak rate	< 1 % Kvs at 5 mH ₂ O pressure difference (at mixing valve inlets)
Insulation material	EPP RG 60 g/l
Overall dimensions	360 x 142 x 245 mm
Total weight	6.3 kg
Connections	4 x G 1" F

Pump Performance Curves

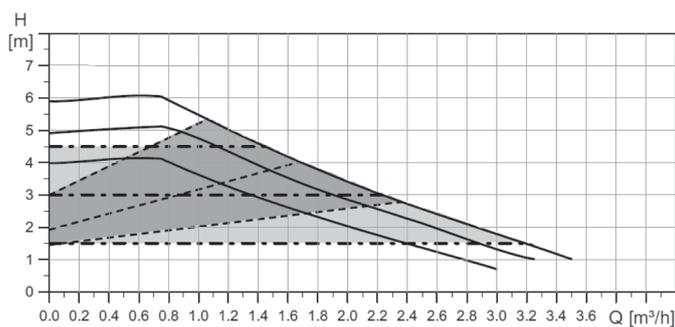


Line type	Mode
—	Constant speed
- - -	Proportional pressure
- · - · -	Constant pressure

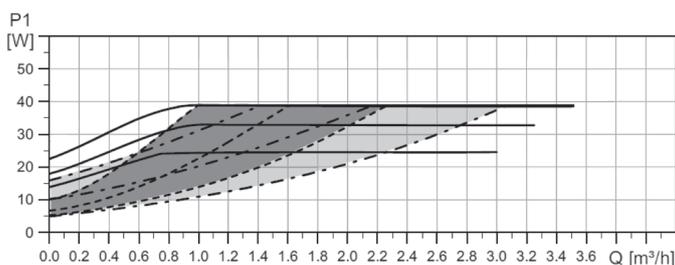


DATA SHEET

CSE2 MIX-BP F G60 1F Pump Station


Pump Electrical Wiring

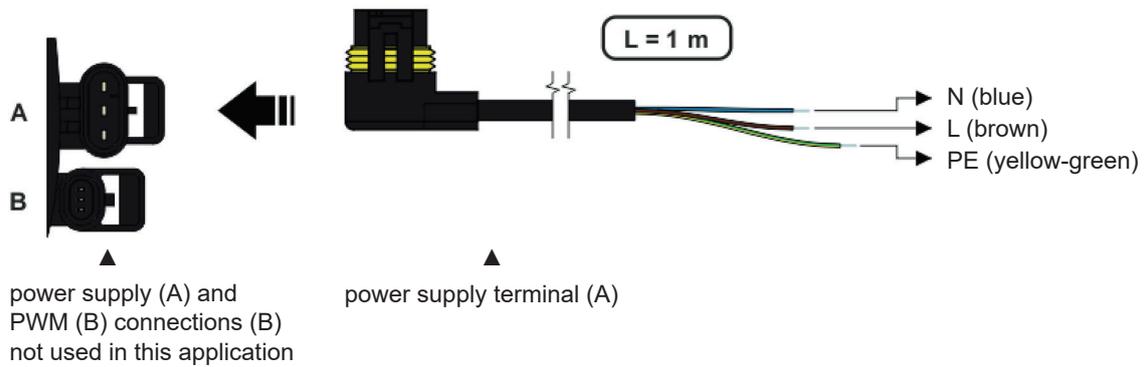

Pump Station Pressure Drop

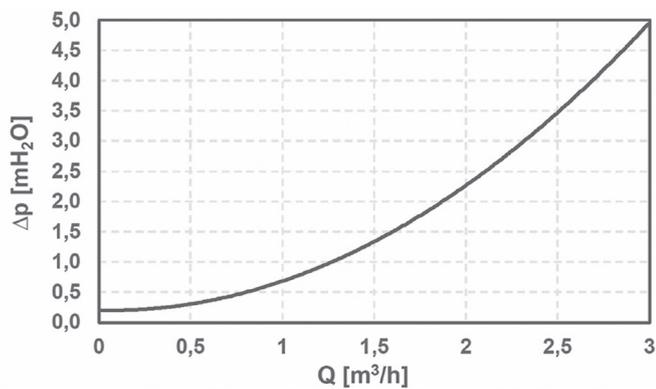

Example of possible connection

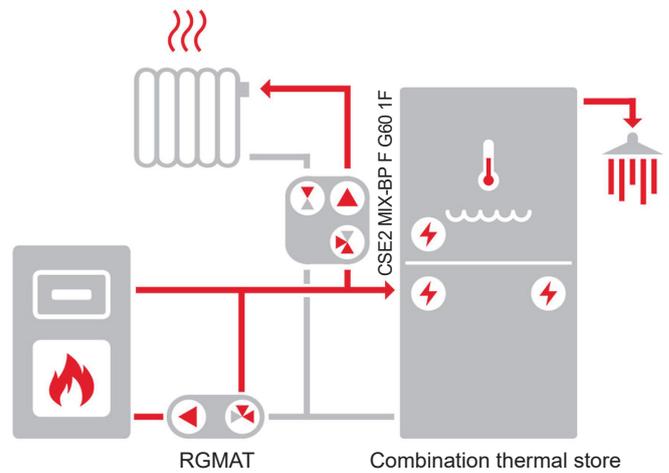

The diagram shows a typical connection of a solid fuel boiler (with the recommended RGMAT pump station – not included in supply), combination thermal store and heating circuit.