


DATA SHEET

Heat Pump Wall Support Bracket for CTC EA, RTC

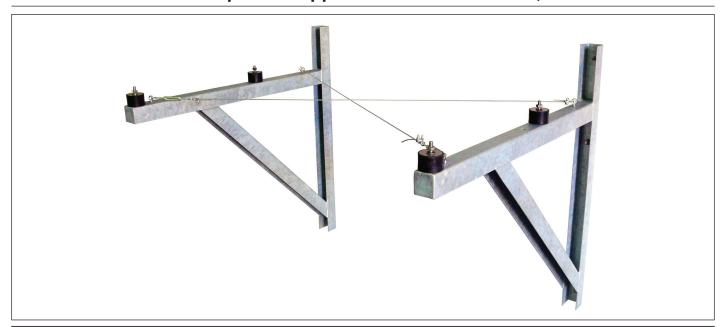

Main Features

Description

Wall support brackets for CTC EA 400, 500, 600 and RTC series heat pumps allow easy and quick mounting on a wall or other vertical structure. It is used to hang the heat pump to the required height above the ground. The surface of the brackets is hot-dip galvanized and thanks to that it is protected against corrosion for a long time

The support structure consists of:

- · welded zinc-plated brackets (2 pcs),
- steel wire ropes (2 pcs)
- flat wire rope clamps (4 pcs)
- lug-hook tensioners M5 (2 pcs)
- M6 x 50 eye bolts (4 pcs)
- silent blocks 60 x 40 mm, M10 x 28 nuts (4 ks)
- · connection material

See Order Code Table below for available support bracket models.

Installation

On a wall or another vertical structure; using a chemical anchor or a thru-wall anchor; the whole structure shall be reinforced with cross bracing and the heat pump put on silent blocks; it shall be ensured that there is sufficient space between the heat pump and the wall behind it, see table below.

Order Code Table						
Heat Pump Model		L _{min}	Bracket code for installation to:		Max. insulation	≥ L _{min}
			uninsulated facade	insulated facade	thickness	
CTC EA	406	300	17458	17458	150	
	408	300	17458	17458	150	
	410	300	17458	18406	200	
	415	400	17458	18406	150	
	420	400	17458	18406	150	
	510M	300	17458	17458	150	
	614M	300	17458	17458	150	
	622M	400	17458	18406	150	
RTC	6i	300	17458	17458	300	
	13e	300	17458	17458	250	

Tel.: +420 241 765 191


Fax: +420 241 763 976


E-mail: sales@regulus.eu Web: www.regulus.eu



DATA SHEET

Heat Pump Wall Support Bracket for CTC EA, RTC

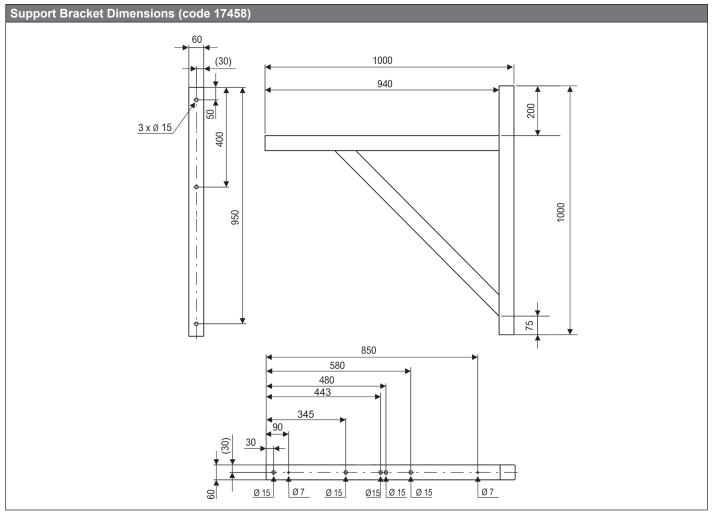

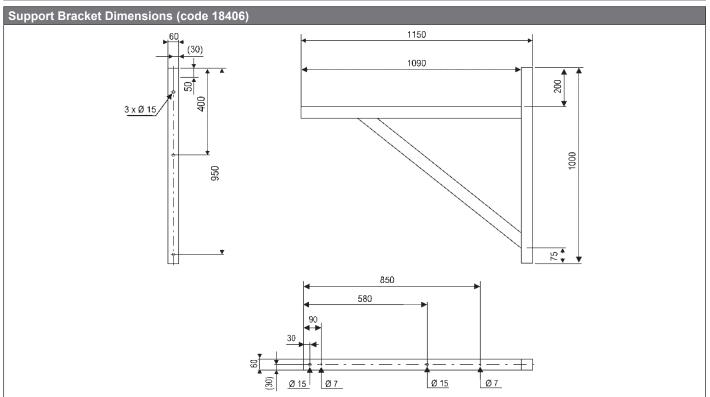

Tel.: +420 241 765 191 E-mail: sales@regulus.eu Fax: +420 241 763 976 Web: www.regulus.eu