

**DUO 1000/200 N P Thermal Store with immersed DHW tank**

	Main Features	
	Application	Combination Thermal Store with immersed stainless steel DHW tank; a tight separating plate increases seasonal performance factor of a heat pump.
	Working fluid	Water, water/glycol mixture (max. 1:1) or water/glycerine mixture (max. 2:1) (thermal store), water (immersed DHW tank).
	Thermal store code	19143
	Insulation code	19334

**Energy Efficiency Data (as per EC Regulation No. 812/2013)**

Energy efficiency class	N/A
Static loss	130 W
Storage volume	903 l

**Technical data**

Total thermal store volume	903 l
Fluid volume in thermal store	729 l
Immersed DHW tank volume	174 l
Max. working temperature in thermal store	95 °C
Max. working temperature in immersed DHW tank	95 °C
Max. working pressure in thermal store	3 bar
Max. working pressure in immersed DHW tank	6 bar
Thermal store diameter	800 mm
Thermal store diameter with insulation	1000 mm
Thermal store overall height	2055 mm
Tipping height without insulation	2095 mm
Thermal store perimeter insulation thickness	100 mm
Thermal store bottom insulation thickness	50 mm
Thermal store top insulation thickness	100 mm
Empty weight without insulation	148 kg

**Materials**

Thermal store material	S235JR
Thermal store perimeter insulation	fleece
Immersed DHW tank	AISI 304
Thermal store outer surface insulation	PU leather
Top and bottom thermal store insulation	fleece

*Insulation thermal conductivity  $\lambda \leq 0.037$  W/mK, thermal resistance (short/long term) 150/100 °C, fire class E.*

**Accessories**

Electric heating element	types ETT-C, F2, M, P, U
Heating element max. length	700 mm
Electronic anode rod	code 13793
Expansion vessel	type HW 8 l and larger

**Spare parts (magnesium anode rods)**


Magnesium anode rod	code 19152
---------------------	------------

**DUO 1000/200 N P Thermal Store with immersed DHW tank**

**Volume of supplied DHW (heated from 10 °C to 40 °C)**



Heated volume	Temperature in thermal store	Backup heater	Flow rate [l/min]	Hot water volume [l]
Entire	60 °C	10 kW	8	730
			12	434
			20	315
Entire	60 °C	none	8	538
			12	451
			20	323
Above metal sheet	60 °C	10 kW	8	254
			12	240
			20	222
Entire	80 °C	none	8	1002
			12	859
			20	665

**DHW heat exchanger pressure drop graph**

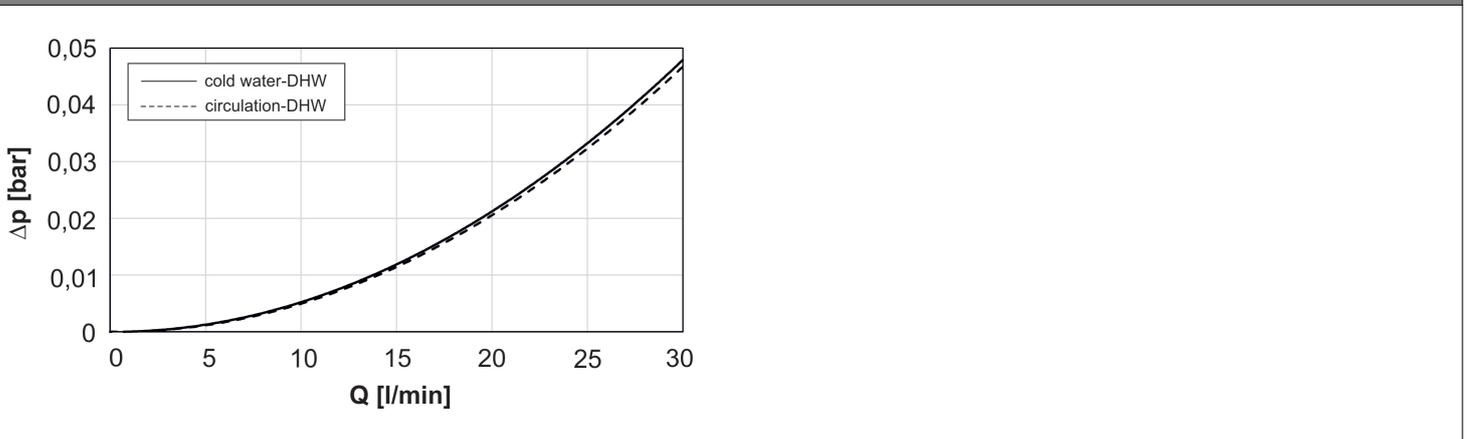

DUO 1000/200 N P Thermal Store with immersed DHW tank

Dimensions

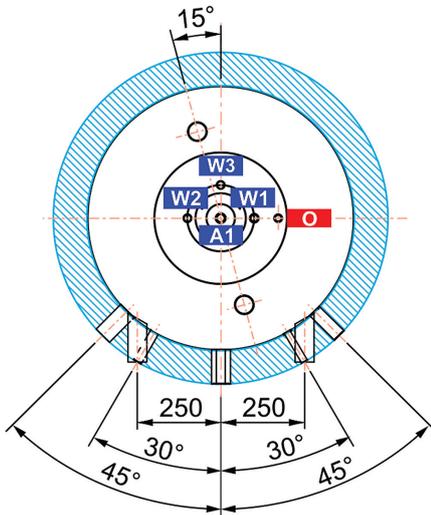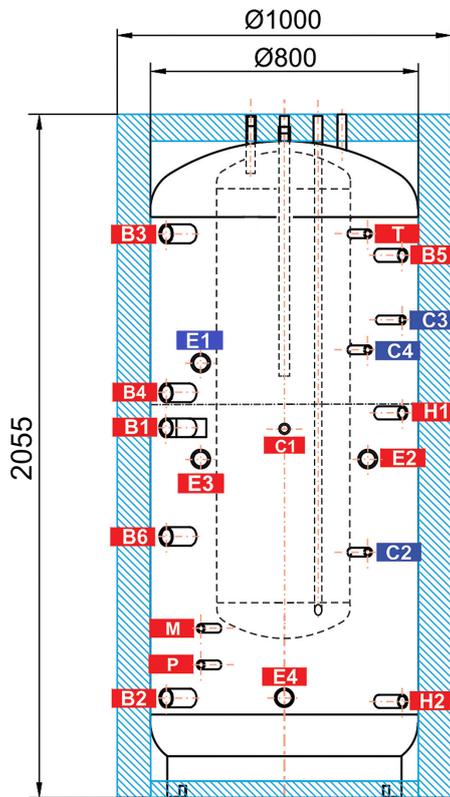

CONNECTIONS

pos.	description	connection	height [mm]
<b>Heat sources</b>			
B1	Supply from heat source	G 6/4" F	1115
B2	Return to heat source	G 6/4" F	300
B3	Supply from heat source	G 6/4" F	1700
B4	Return to heat source	G 6/4" F	1220
B5	Supply from heat source	G 1" F	1635
B6	Supply from heat source	G 6/4" F	785
<b>Heating system</b>			
H1	Flow to heating system	G 1" F	1160
H2	Return from heating system	G 1" F	290
<b>Electric heating element</b>			
E1	El. heating element (DHW)	G 6/4" F	1310
E2	El. heating element (space heating)	G 6/4" F	1020
E3	El. heating element (space heating)	G 6/4" F	1020
E4	El. heating element (for PV system)	G 6/4" F	300
<b>DHW heating</b>			
W1	Cold water	G 3/4" F	2055
W2	Domestic hot water	G 3/4" F	2055
W3	Recirculation	G 3/4" F	2055
A1	Anode	G 3/4" F	2025
<b>Control and safety</b>			
C1	Temperature sensor	G 1/2" F	1130
C2	Temperature sensor	G 1/2" F	740
C3	Temperature sensor	G 1/2" F	1440
C4	Temperature sensor	G 1/2" F	1350
T	Thermometer	G 1/2" F	1700
M	Pressure gauge	G 1/2" F	510
P	Safety valve	G 1/2" F	400
<b>Air discharge</b>			
O	Air vent valve	G 1/2" F	2055