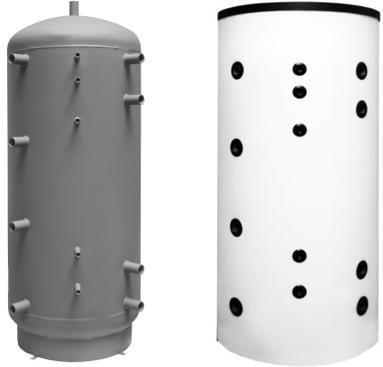


## DATA SHEET

### PS 1000 N+ Thermal Store

	Main Features	
	Application	Storage and subsequent distribution of thermal energy from solid-fuel boilers, heat pumps or other heat sources
	Working fluid	water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1), thermal oil
	Storage tank code	15147
	Insulation code	19049

#### Energy Efficiency Data (as per EC Regulation No. 812/2013)

	valid for a tank with insulation
Energy efficiency class	N/A
Static loss	130 W
Storage volume	927 l

#### Technical data

Total storage tank volume	927 l
Max. working temperature in storage tank	95 °C
Max. working pressure in storage tank	4 bar
Storage tank diameter	800 mm
Storage tank diameter with insulation	1000 mm
Storage tank overall height	2080 mm
Tipping height without insulation	2120 mm
Storage tank perimeter insulation thickness	100 mm
Storage tank bottom insulation thickness	50 mm
Storage tank top insulation thickness	100 mm
Empty weight without insulation	109 kg

#### Materials


Storage tank material	S235JR
Storage tank perimeter insulation	fleece
Storage tank outer surface insulation	hard polystyrene
Top and bottom storage tank insulation	fleece

#### Accessories

Electrical heating element	ETT-A, C, D, F, P, M
Heating element max. length	815 mm

PS 1000 N+ Thermal Store

Dimensions

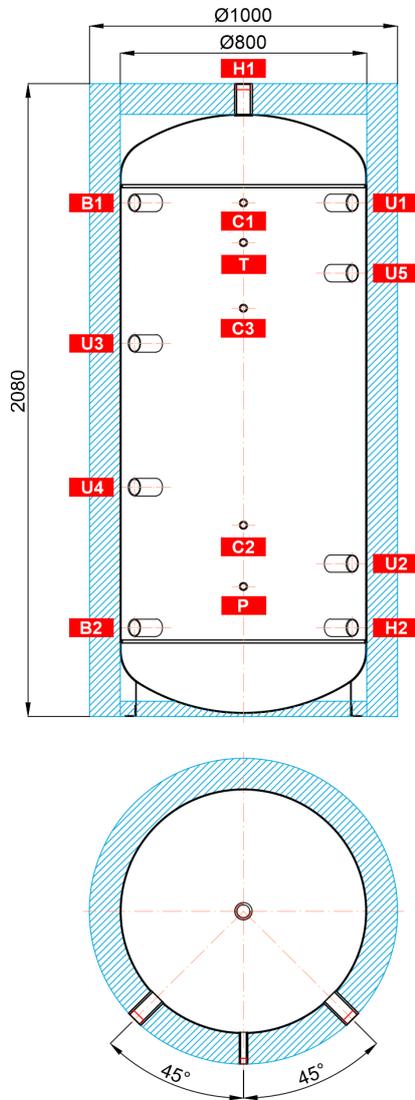

TAPPINGS

pos.	description	connection	height [mm]
<b>Heat sources</b>			
<b>B1</b>	Supply from heat source	G 6/4" F	1690
<b>B2</b>	Return to heat source	G 6/4" F	300
<b>Heating system</b>			
<b>H1</b>	Supply to heat sink	G 6/4" F	2080
<b>H2</b>	Return from heat sink	G 6/4" F	300
<b>Control and safety</b>			
<b>C1</b>	Temperature sensor	G 1/2" F	1690
<b>C2</b>	Temperature sensor	G 1/2" F	635
<b>C3</b>	Temperature sensor	G 1/2" F	1345
<b>T</b>	Thermometer	G 1/2" F	1560
<b>P</b>	Safety valve	G 1/2" F	435
<b>Universal inlet/outlet</b>			
<b>U1</b>	Universal inlet/outlet	G 6/4" F	1690
<b>U2</b>	Universal inlet/outlet	G 6/4" F	510
<b>U3</b>	Universal inlet/outlet	G 6/4" F	1230
<b>U4</b>	Universal inlet/outlet	G 6/4" F	760
<b>U5</b>	Universal inlet/outlet	G 6/4" F	1460