

**PS2F 1000 N+ Thermal Store**

**PS2F 1000 N+**



**PS2F 1000 N+ with insulation**




Main features	
Application	storage and subsequent distribution of thermal energy from solid-fuel boilers, heat pumps or other heat sources; the tank is fitted with 2 flanged openings that can permit installation of a DHW tube heat exchanger or connecting a solar thermal system
Description	welded steel tank
Working fluid	water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1), thermal oil
Code	
Thermal Store	<b>15 221</b>
Insulation	<b>16 360</b>
Energy Efficiency Data (as per EC Regulation No. 812/2013)	
Energy efficiency class	<b>PS2F 1000 N+ with insulation</b> N/A
Standing loss	145 W
Storage volume	932 l
Technical Data	
Total tank volume	932 l
Max. working temperature in Thermal Store	95 °C
Max. working pressure in Thermal Store	4 bar
Materials	
Tank material	S235JR
Tank perimeter insulation	fleece
Tank perimeter insulation's outer surface	PU leather
Top and bottom tank insulation	fleece
Dimensions, Tipping height, Insulation thickness, Weight	
Tank diameter	800 mm
Tank diameter with insulation	1000 mm
Tank overall height	2080 mm
Tipping height without insulation	2120 mm
Tank perimeter insulation thickness	100 mm
Bottom insulation thickness	50 mm
Top insulation thickness	120 mm
Empty weight without insulation	116 kg
Accessories	
El. heating element (models)	ETT-A,C, D, F, G, L, M
Heating elem. max. length / output	815 mm / 12 kW
Blind flange	code 6230
Flange for heat exchanger	code 6 231 / 6 232
Tube heat exchanger	max surface area 4,5 sqm

**PS2F 1000 N+ Thermal Store**

**Dimensions**

Tipping height without insulation 2120 mm.

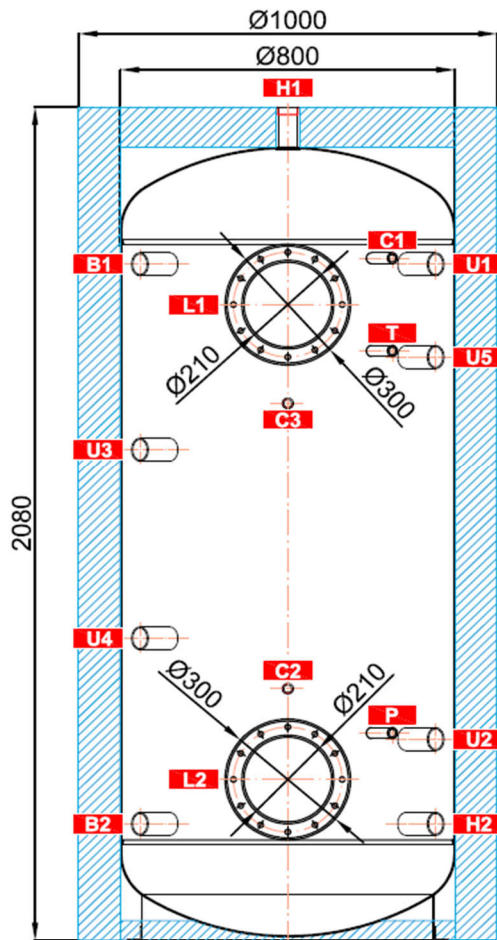

**TAPPINGS**

pos.	connection	height [mm]
<b>Heat sources</b>		
B1	G 6/4" F	1690
B2	G 6/4" F	300
<b>Heating system</b>		
H1	G 6/4" F	2080
H2	G 6/4" F	300
<b>Control and safety</b>		
C1	G 1/2" F	1705
C2	G 1/2" F	635
C3	G 1/2" F	1345
T	G 1/2" F	1475
P	G 1/2" F	525
<b>Universal inlet/outlet</b>		
U1	G 6/4" F	1690
U2	G 6/4" F	510
U3	G 6/4" F	1230
U4	G 6/4" F	760
U5	G 6/4" F	1460
<b>Flanges</b>		
L1	12 x M12	1590
L2	12 x M12	410