

## R0BC 1000 Hot Water Storage Tank


v1.2.1\_03/2017



Main features	
Application	DHW heating
Description	hot water storage tank, permitting installation of an el. heating element
Working fluid	water
<b>Code</b>	<b>10 365</b>
Energy Efficiency Data (as per EC Regulation No. 813/2013)	
	<b>R0BC 1000</b>
Energy efficiency class	<b>N/A</b>
Standing loss	<b>125 W</b>
Storage volume	<b>885 l</b>
Technical data	
Total tank volume	885 l
Max. working temperature in tank	95 °C
Max. working pressure in tank	10 bar
Materials	
Tank material	S235JR, inner surface enamelled (DIN 4756)
Tank perimeter insulation	PU foam (hard)
Insulation's outer surface	plastic
Dimensions, Tipping height, Weight	
Tank diameter	790 mm
Tank diameter with insulation	950 mm
Tank overall height	2120 mm
Tipping height	2330 mm
Empty weight	213 kg
Accessories	
El. heating element	models ETT-A, D, F, G, M
Heating elem. max. length / output	815 mm / 12,0 kW
Electronic anode rod	code 9 175
Spare parts (magnesium anode rods)	
Mg anode r. (A1), G 5/4"	code 464
Mg anode r. - chain type, G 5/4"	code 13 112

Dimensions

Tipping height 2330 mm.

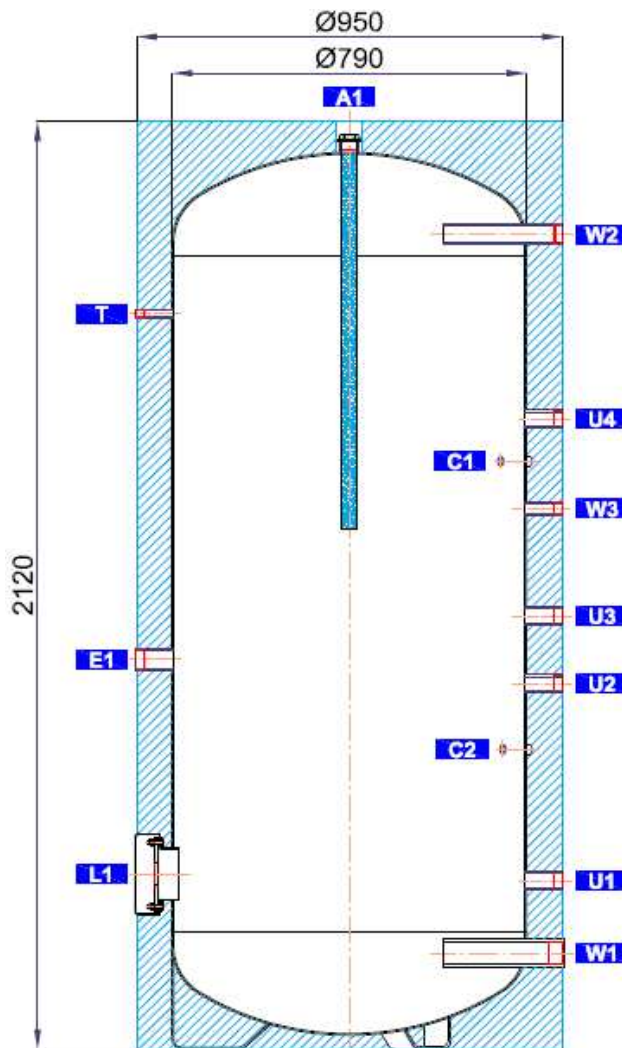

TAPPINGS

pos.	connection	height [mm]
<b>DHW heating</b>		
W1	G 2" F	220
W2	G 2" F	1840
W3	G 1" F	1235
<b>El. heating elements</b>		
E1	G 6/4" F	890
<b>Control and safety</b>		
C1	G 1/2" F	1340
C2	G 1/2" F	685
T	G 1/2" F	1680
<b>Universal inlet / outlet</b>		
U1	G 5/4" F	385
U2	G 5/4" F	835
U3	G 5/4" F	990
U4	G 5/4" F	1440
<b>Flange</b>		
L1	8 x M10	400
<b>Magnesium anode rod</b>		
A1	G 5/4" F	2069