


R0BC 1500 Hot Water Storage Tank

	Main Features	
	Application	Hot Water Storage Tank with no inner heat exchangers is intended for DHW heating. Up to 2 heat sources can be connected via external heat exchangers. It comes fitted with detachable insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
	Working fluid	water
	Code	16715

Energy Efficiency Data (as per EC Regulation No. 812/2013)

Energy efficiency class	N/A
Static loss	146 W
Storage volume	1494 l

Technical data

Total DHW tank volume	1494 l
Max. working temperature in DHW tank	95 °C
Max. working pressure in DHW tank	10 bar
DHW tank diameter	1000 mm
DHW tank diameter with insulation	1200 mm
DHW tank overall height	2285 mm
Tipping height	2590 mm
DHW tank empty weight	342 kg

Materials

DHW tank material	S235JR, inner surf. enamelled (DIN 4753-3)
DHW tank insulation	fleece
DHW tank outer surface insulation	PVC

Accessories


Electric heating element	models ETT-A, D2, M, N, R, S, F2, P, U
Heating element max. length for E1 / flange	815 mm / 815 mm
Electronic anode rod	code 14429
Electronic anode rod with flange for heating element	code 17435

Spare parts (magnesium anode rods)

Mg anode rod (A1)	code 464
Mg anode rod (A2)	code 448
Mg anode rod - chain type	code 13112

R0BC 1500 Hot Water Storage Tank

Dimensions

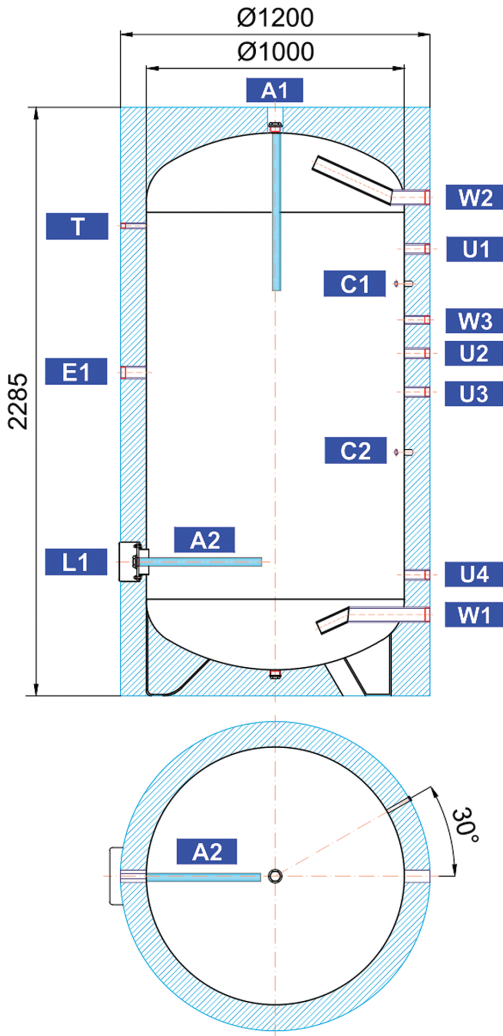

CONNECTIONS

pos.	description	connection	height [mm]
DHW heating			
W1	Cold water	G 2" F	315
W2	Domestic hot water	G 2" F	1935
W3	Recirculation	G 1" F	1460
Auxiliary heat source			
E1	Electric heating element	G 6/4" F	1255
Control and safety			
C1	Temperature sensor	G 1/2" F	1600
C2	Temperature sensor	G 1/2" F	945
T	Thermometer	G 1/2" F	1825
Universal inlet/outlet			
U1	Universal inlet/outlet	G 5/4" F	1735
U2	Universal inlet/outlet	G 5/4" F	1330
U3	Universal inlet/outlet	G 5/4" F	1180
U4	Universal inlet/outlet	G 5/4" F	470
Others			
L1	Flange	8 x M10	520
A1	Magnesium anode rod	G 5/4" F	2205
A2	Magnesium anode rod	G 5/4" F	520