


**RGC 170 Hot Water Storage Tank**

	<b>Main Features</b>	
	<b>Application</b>	Hot water tank with integrated heat exchanger and enamelled inner surface, intended for DHW heating. It comes fitted with non-detachable insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
	<b>Working fluid</b>	water (tank) - water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1) (heat exchanger)
	<b>Code</b>	19196

**Energy Efficiency Data (as per EC Regulation No. 812/2013)**

Energy efficiency class	B
Static loss	57 W
Storage volume	166 l

**Technical data**

Total DHW tank volume	173 l
Fluid volume in DHW tank	166 l
Heat exchanger volume	7.0 l
Heat exchanger surface area	1.6 m <sup>2</sup>
Max. working temperature in DHW tank	95 °C
Max. working temperature in heat exchanger	100 °C
Max. working pressure in DHW tank	6 bar
Max. working pressure in heat exchanger	6 bar
DHW tank diameter	600 mm
DHW tank diameter with insulation	715 mm
DHW tank overall height	1030 mm
Tipping height	1210 mm
DHW tank empty weight	98 kg

**Power for hot water heating from 10 °C to 45 °C at heating water temperature 60 °C**

Heat exchanger performance	24 kW, (600 l/h)
----------------------------	------------------

**Materials**

DHW tank material	S235JR, inner surf. enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surf. enamelled (DIN 4753-3)
DHW tank insulation	PU foam (hard)
DHW tank outer surface insulation	plastic

**Accessories**



Electric heating element	models ETT-A, D2, M, N, R, S, F2, P, U
Heating element max. length for E1	500 mm
Electronic anode rod	code 9176

**Spare parts (magnesium anode rods)**

Mg anode rod (A1)	code 448
-------------------	----------

RGC 170 Hot Water Storage Tank

Dimensions

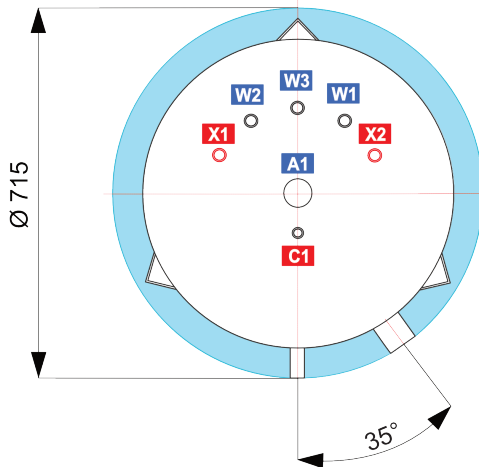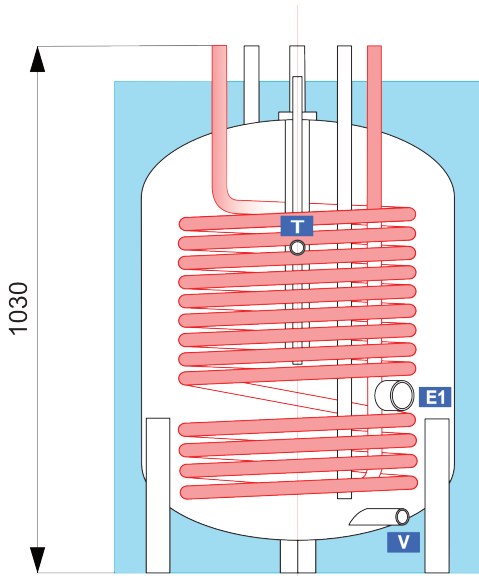

CONNECTIONS

pos.	description	connection	height [mm]
<b>DHW heating</b>			
W1	Cold water	G 3/4" M	1030
W2	Domestic hot water	G 3/4" M	1030
W3	Recirculation	G 3/4" M	1030
<b>Auxiliary heat source</b>			
E1	Electric heating element	G 6/4" F	345
<b>Control and safety</b>			
C1	Temperature sensor	15 mm	980
T	Thermometer	G 1/2" F	630
<b>Heat sources</b>			
X1	Supply from heat source	G 3/4" M	1030
X2	Return to heat source	G 3/4" M	1030
<b>Others</b>			
A1	Magnesium anode rod	G 5/4" F	930
V	Drain valve	G 1/2" F	110

RGC 170 Hot Water Storage Tank

Pressure drop diagram

