



REGOMAT W

Installation and Operation Manual
REGOMAT W LOAD UNIT with YONOS PARA 25/6
for heating systems

EN

REGOMAT W

1. Introduction

REGOMAT W Load Unit makes boiler installation quicker as it contains all components needed for boiler circuit circulation and for boiler protection against low-temperature corrosion. It is designed to be installed directly on return piping. This Load Unit is intended for hydronic fireplaces and solid-fuel boilers.

2. Regomat W Description


Regomat W keeps the temperature in a hydraulic boiler circuit above the flue gas condensation temperatures, which prevents so called low-temperature corrosion of the boiler combustion chamber. This limits condensation and boiler tarring significantly, the efficiency of fuel combustion increases and service life of the boiler is extended.

Main features	
Purpose	Load Unit for solid-fuel boilers and fireplaces; it prevents low-temperature corrosion and boiler (fire) fouling
Application	maintaining a minimum inlet temperature into a boiler (fireplace) through a load valve
Description	consists of a YONOS PARA RS 25/6 RKC pump, a TSV3B valve (with automatic bypass balancing) and fittings
Working fluid	water, water-glycol mixture (max. 1:1) or water-glycerine mixture (max. 2:1)
Installation	on a boiler return pipe

Code	Max. boiler output
12 943 for opening temperature 45 °C	max. 45 kW
12 944 for opening temperature 55 °C	max. 36 kW
12 945 for opening temperature 65 °C	max. 26 kW

REGOMAT W Technical Data	
Fluid working temperature	0 - 95 °C
Max. working pressure	6 bar
Max. ambient temperature	58 °C
Power supply	230 V, 50 Hz
Overall dimensions	310 x 140 x 150 mm
Total weight	3 kg
Connections	3x G 1" F

3. Regomat W Connection Diagram

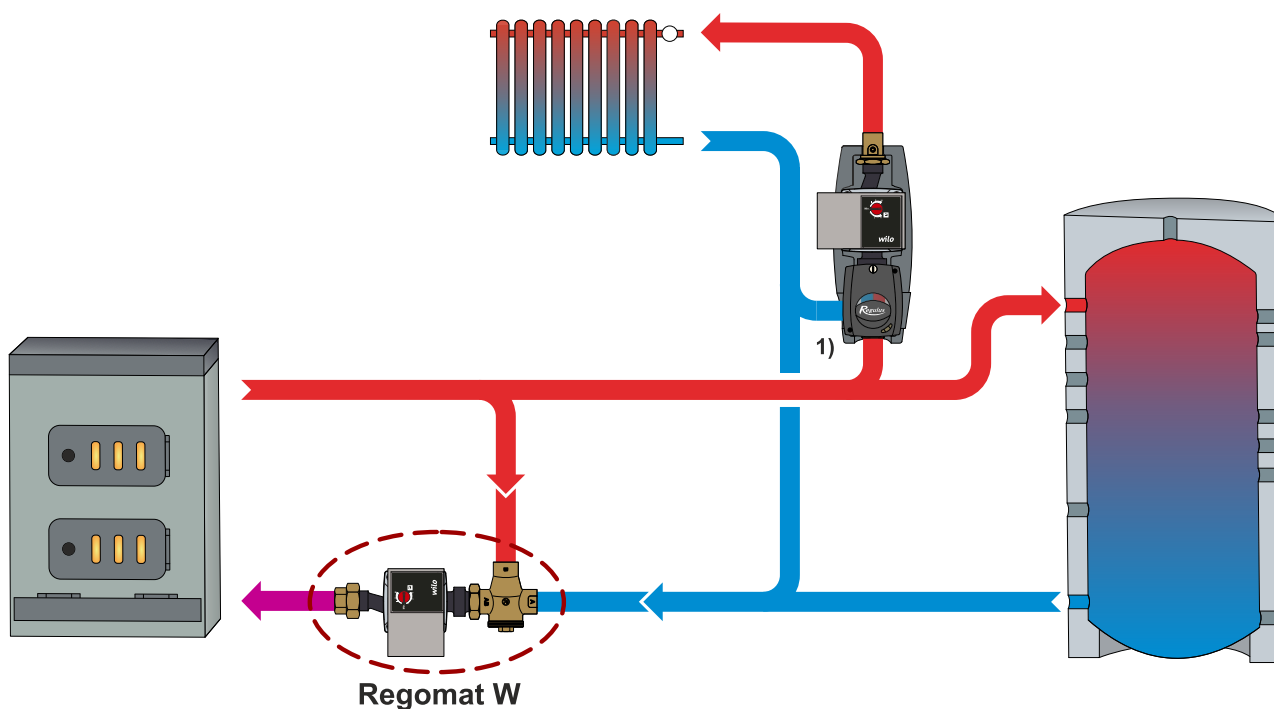

1) CSE MIX W 1F (16 219) or CSE MIX W 1M (16 082) or CSE MIX W 5/4F (16215) or CSE MIX W 1F 7,5 (16 372)

Install the Load Unit respecting the following instructions:


Connect the Load Unit outlet marked **AB** to the piping entering the boiler. Connect the return line from the heating system to the **A** inlet, and the outlet pipe from the boiler to the **B** inlet via a T-piece. Take care to install shut-off valves where necessary to avoid draining the whole system for valve cleaning or replacing the thermostatic element.

When the connecting pipes are not arranged or sloped properly, the load valve may get blocked by air inside. This may hinder or even disable its operation.


Always respect valid rules and boiler manufacturer's data during installation.

4. Installation options

This Load Unit comes in the version for horizontal installation to the right of a boiler. However, it can be installed also into vertical piping or horizontally to the left of a boiler. When being installed horizontally to the left of a boiler, the Load Unit needs to be turned by 180° and the TSV3B valve turned as shown in the pics below.

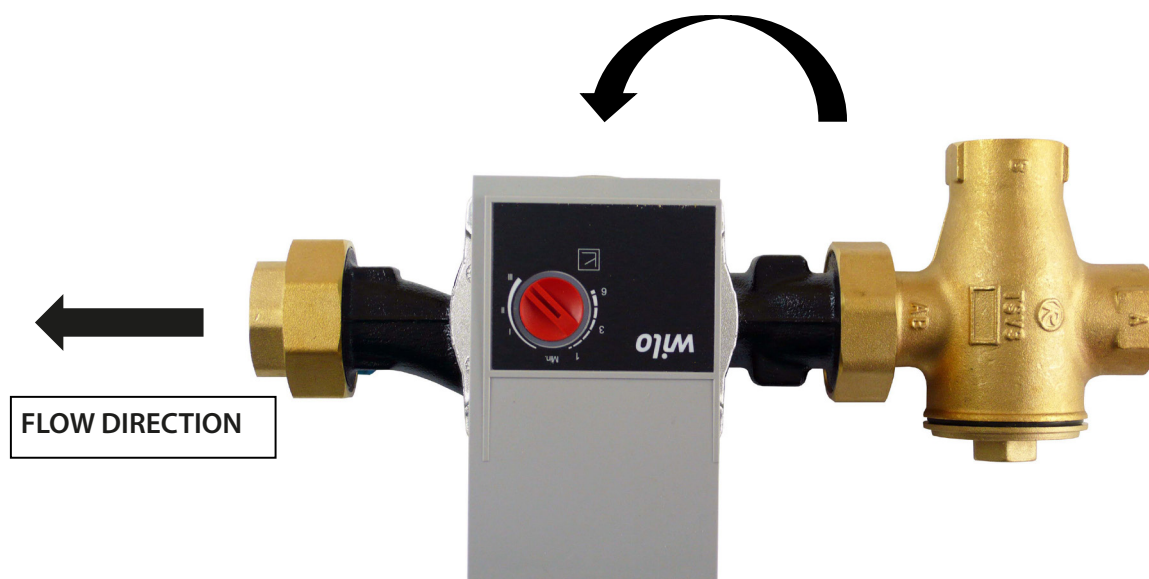

5. Function description of TSV3B valve

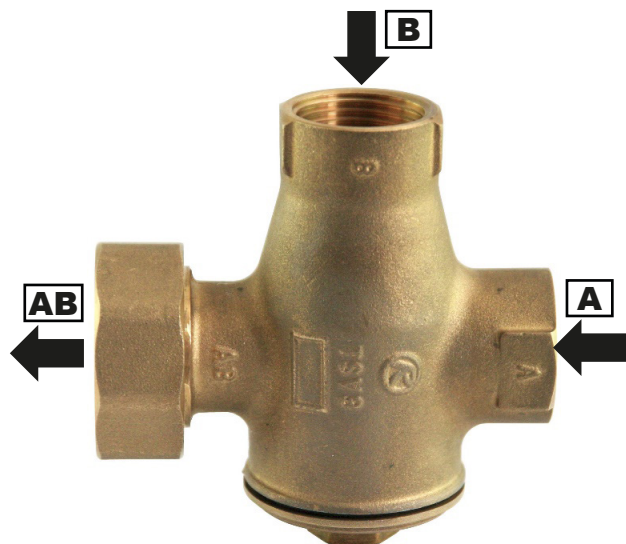

The TSV3B load valve is fitted with an integrated thermostatic insert that will close the **A** inlet (from a heating system), if the return water temperature to the boiler (**AB** outlet) is lower than the opening one. As soon as the opening temperature is reached, the thermostat starts opening the **A** inlet slowly and mixing the cold return water with the hot water from the **B** inlet (boiler flow) with the aim to reach the valve opening temperature in the return pipe (**AB** outlet). At the same time, the valve closes the **B** inlet, limiting so hot water flow coming from the bypass till its complete tight closure. Thanks to this, no balancing valve is needed. The load valve is made of brass, the element and plug seals are in EPDM, the cone seal is made of NBR.


Technical data

Max. working temperature	95 °C
Max. pracovní tlak	6 bar
Valve opening temperature	depending on the thermostatic element
Control range	$t_{\text{valve opening}} + 5\text{ °C}$
Valve Kvs (A→AB direction)	6,2 m ³ /h
Valve Kvs (B→AB direction)	4,4 m ³ /h
Connections	2x G 1" F, 1x union nut G 6/4" Fu
Nominal inner diameter	DN 25

Materials

Housing, cone and plug	brass
Spring	stainless steel
Element and plug seals	EPDM
Cone seal	NBR

Valve pressure drop graph

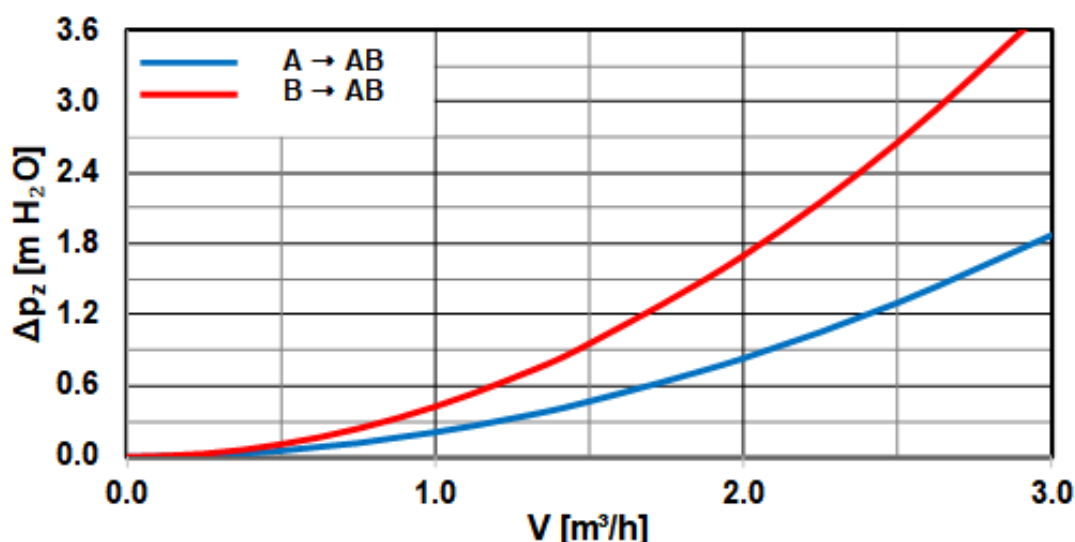

6. YONOS PARA RS 25/6 RKC Pump

Design


Wet-running circulation pump with G 6/4" M connection.

Electrical data	
Power supply	230 V, 50 Hz
Power input (min./max.)	3/45 W
Current (min./max)	0,03/0,44 A
IP rating	IPX4D
Max. speed	4300 rpm
Energy Efficiency Index	≤ 0,20 by EN 16 297/3
Motor protection	integrated

Minimum pressure at suction port	
Min. pressure at suction port to avoid cavitation	0.05 bar at 50 °C
	0.43 bar at 95 °C

Operating conditions	
Fluid working temperature	0 - 100 °C at 58 °C ambient temperature
Max. working pressure	6 bar
Max. head	6,2 m


Pump Wiring

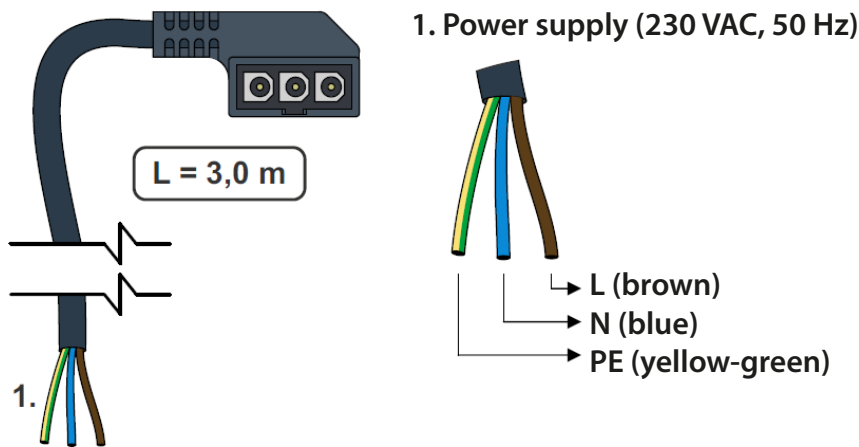


Power cable is included in supply

Performance curves

Characteristics of $\Delta p-v$ (variable)

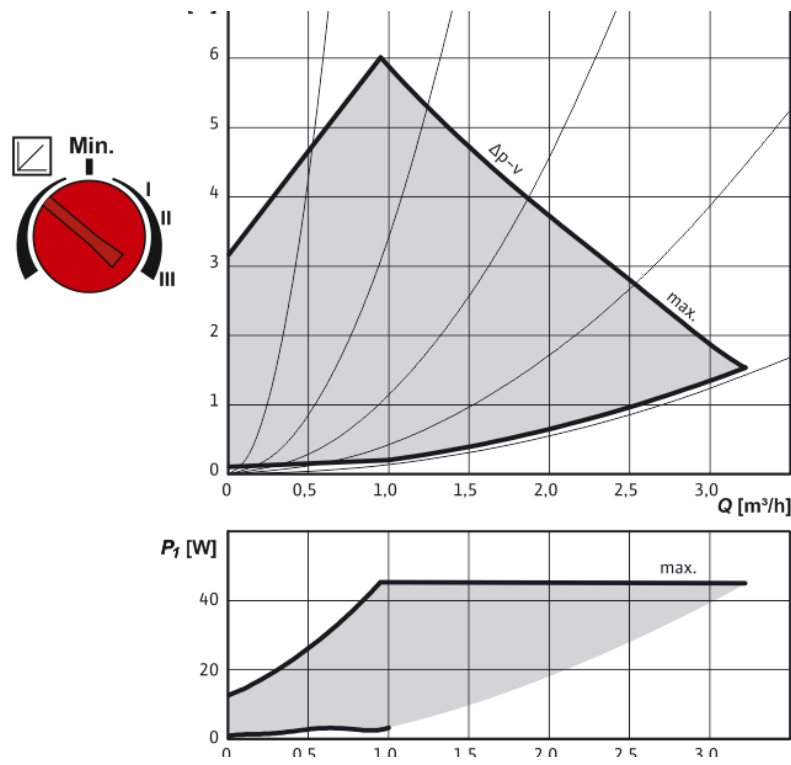

Constant speed I, II, III

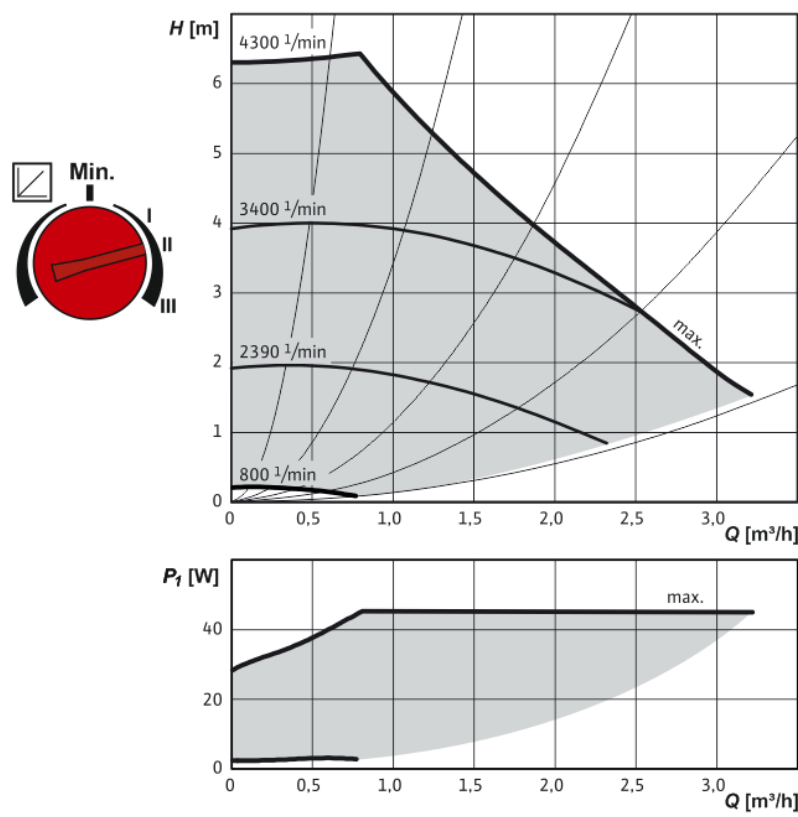

REGULUS spol. s r.o.

E-mail: sales@regulus.eu

Web: www.regulus.eu

